



Pictorial — typical

ISSUED FOR USE · PATTERN DRAWING — NOT FOR MANUFACTURE
() = reference dimension, scaled from the maker drawing

LOADS

Load	Vertical (compression)
Rated load per castor	5 000 kg

Vertical load per castor (compression). Hard, flat, prepared surfaces only. Allow for uneven corner loads.

DRAWING DATA


Drawing no.	TLA-DRW-MOV-CWBE-50
Title	Castor wheel, bottom entry — 5.0 t
SKUs	TLA-MOV-CWBE-50-TL / -PL · TLA-MOV-CWBE-50F-TL / -PL
Revision	REV 1 · 2026-10-20
Scale / sheet	1:5 · A3 · sheet 1 of 1
Units / projection	mm · ISO first angle
Basis	Catalogue 2026 p59 · maker data · height measured
Drawn	Claude for Twistlock Africa
Checked / approved	R. Siebenhaar · 2026-10-20
Wheels	2 × Ø300 × 100 (twin)
Height (-TL)	430 measured; interface 51 (dovetail 46 + plate 5)
Top plate / fixing	240 × 180 × 16 · 4 × Ø18.5 at 197 × 102
Offset	(84) reference, scaled
Swivel bearings	51122 + 30208
Legs	16 mm plate, welded to housing
Brake	Thumb screw onto the wheel rim
Finish	Painted, Twistlock Africa blue
Mass	84 kg (-TL)

NOTES


- Heights are to the twistlock landing pad, where the container's bottom corner casting sits. -PL castors (no twistlock): deduct the interface, 51 mm (46 dovetail + 5 fitment plate).
- Fixed castors (F): same wheels, top plate and heights; no swivel.
- Integrated stand standard. Options: swivel lock at 90° (swivel castors); steering arm.
- () = reference dimension, derived or scaled. Housing, legs, interface, cone and brake are pattern shapes, scaled.
- Pattern drawing for identification and selection. Not for manufacture. Not a lifting point.

REVISIONS

Rev	Date	Description	By
0	2026-10-07	Issued for use	RS
1	2026-10-20	WhatsApp number updated; offset shown as reference RS	




First angle

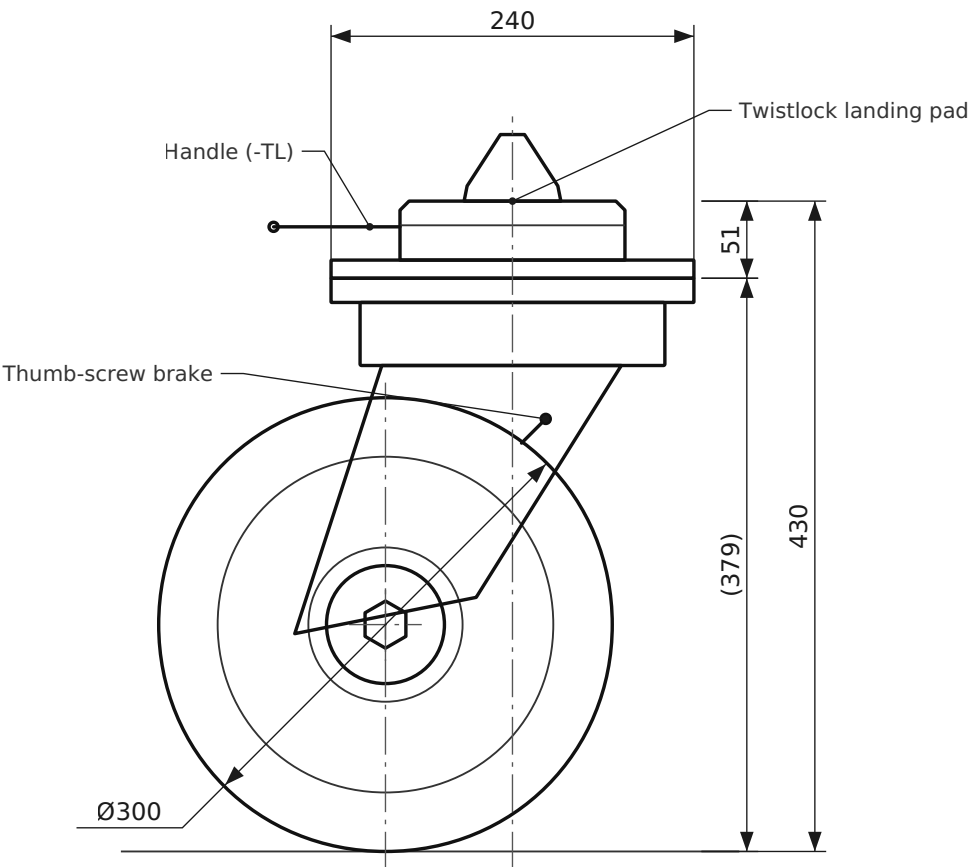


SIDE ELEVATION

Scale 1:5 · swivel castor · -TL shown

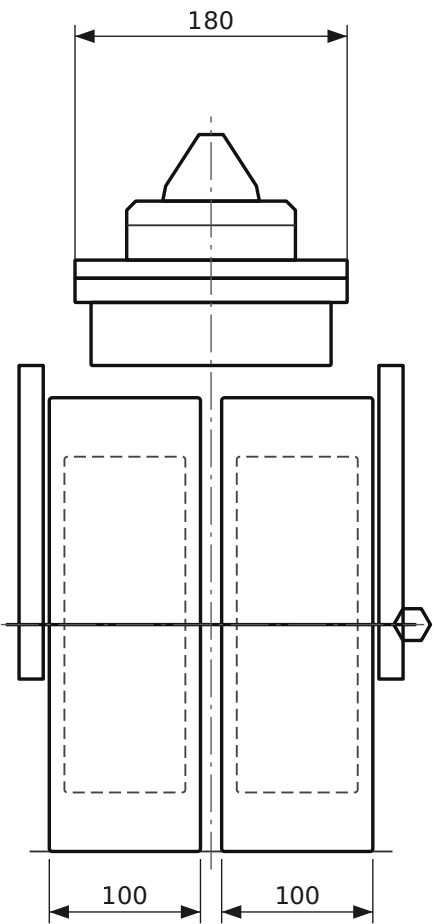

END ELEVATION

Scale 1:5 · wheels 2 × Ø300 × 100

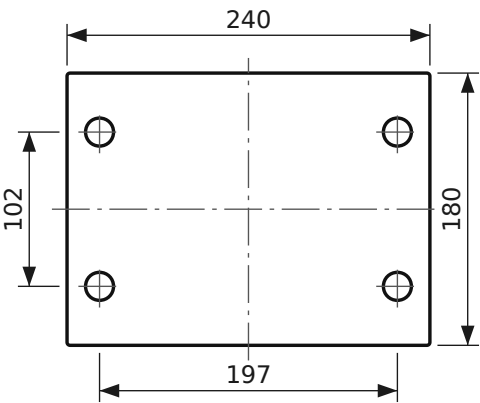

TOP PLATE — PLAN

Scale 1:5 · 240 × 180 × 16 plate · 4 × Ø18.5 holes

CASTOR WHEEL — BOTTOM ENTRY — 5.0 t

Pattern drawing · TLA-MOV-CWBE-50(F)-TL / -PL · twin wheel · 5 000 kg per castor

Twistlock Africa (Pty) Ltd · Container Accessories Specialists
61 Erasmus Road, Edenglen, Edenvale, 1609, Gauteng, South Africa
www.twistlockafrica.co.za



TLA-DRW-MOV-CWBE-50

REV 1 · 2026-10-20

info@twistlockafrica.co.za
Tel +27 11 609 7873 · WhatsApp +27 60 697 2546
Sheet 1 of 1 · A3 · Scale 1:5



latest revision